


Compressed Air & Gas Filtration

Altec AIR's Mist Eliminators remove oil and water from compressed air and gas, utilizing a combination of low operating velocities, deep beds, and Brownian diffusion as the predominant collecting mechanism to achieve high efficiency with very long operating life and low pressure drops.



- Up to 99.95+% submicron particle mist removal in typical compressed air service
- Efficiency remains above 99% at significantly turned down flow rates
- Pressure drop is typically less than 0.5 PSIG, providing appreciable operating power savings
- Can tolerate high inlet loadings caused by temporary upsets or surges
- Extended desiccant life

		Capacity (SCFM)	Inlet/Outlet Port Size (in)	Drain Port Size (in)	Vessel Width (H1) (in)	Vessel Height (H2) (ft in)	Leg Height (H3) (in)
SPECIFICATIONS & DIMENSIONS	AME-0085	85	2"	1"	14"	1' 1"	18"
	AME-0180	180				1' 5"	
	AME-0435	435	2' 5"				
	AME-0785	785	2.5"		16"	3' 11"	
	AME-1015	1015					
	AME-1305	1305	4"		18"	3' 1"	
	AME-1450	1450					
	AME-2175	2175	24"	4' 2"			
	AME-2900	2900					
	AME-4350	4350	6"	1.5"	9' 9"	30"	
	AME-6160	6160	8"	2"	30"		9' 11"
	AME-7250	7250					11' 11"
AME-8700	8700				13' 11"		

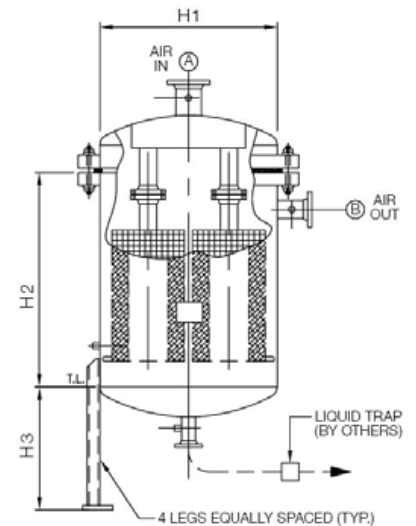

For more complete information on Altec AIR products and services, visit us on the web at www.AltecAIR.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec AIR representative for all available options. Altec AIR logo is a registered trademark of Altec Inc. in the United States and various other countries and may not be used without permission. © 2025 Altec AIR. All Rights Reserved. SPEC-MIST-ELIM-0325

